


Reduced Head Knurled Body

Open End - Metric Body Size



Steel - Zinc & Clear | A2 Stainless Steel

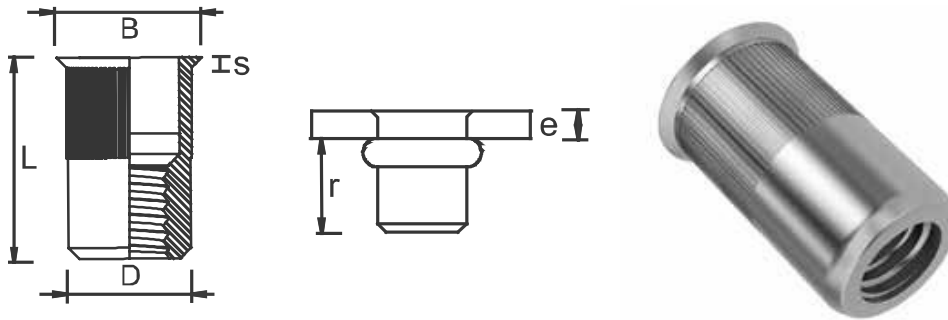

Dimensions - Steel - Zinc & Clear:

Thread	Hole size +0.1/-0.0mm	Body diameter (D) +0.07/-0.1mm	Head diameter (mm) (B)	Overall length (mm) (L)	Head thickness (mm) (S)	Grip range (mm) (e)	Head style	(r) Dimension (mm)	Body Style
M3	5.0	4.9	6.0	9.0	0.5	0.5 - 2	Reduced Countersunk	6.2	Knurled
M4	6.0	5.9	7.0	11.2	0.5	0.5 - 2	Reduced Countersunk	7.0	Knurled
M5	7.0	6.9	8.0	11.5	0.5	0.5 - 2	Reduced Countersunk	7.0	Knurled
M6	9.0	8.9	10.0	14.0	0.6	0.5 - 2.5	Reduced Countersunk	8.5	Knurled
M8	11.0	10.9	12.0	16.5	0.65	0.5 - 3	Reduced Countersunk	10.0	Knurled
M10 Alt	12.0	11.9	13.0	19.5	0.7	1 - 3.5	Reduced Countersunk	12.5	Knurled
M10	13.0	12.9	14.0	19.5	0.7	1 - 3.5	Reduced Countersunk	12.5	Knurled

Dimensions - A2 Stainless Steel:

Thread	Hole size +0.1/-0.0mm	Body diameter (D) +0.07/-0.1mm	Head diameter (mm) (B)	Overall length (mm) (L)	Head thickness (mm) (S)	Grip range (mm) (e)	Head style	(r) Dimension (mm)	Body Style
M4	6.0	5.9	7.0	10.5	0.5	0.5 - 2	Reduced Countersunk	6.5	Knurled
M5	7.0	6.9	8.0	11.5	0.5	0.5 - 2	Reduced Countersunk	7.2	Knurled
M6	9.0	8.9	10.0	14.0	0.6	0.5 - 2.5	Reduced Countersunk	8.7	Knurled
M8	11.0	10.9	12.0	16.5	0.65	0.5 - 3	Reduced Countersunk	10.5	Knurled
M10	13.0	12.9	14.0	17.7	0.7	1 - 3.5	Reduced Countersunk	10.7	Knurled

How to specify part numbers for Blind Rivet Nuts: Thread - Head - Style - Material - Body

Example: M6, reduced head, open end, steel, knurled body = M6 - REDE - OE - ST - KG